


RSL SERIES

105°C, 7mm Height, Low Impedance

■ Features


- 7mm Height, Low Impedance, Radial
- Wide temperature range
- Load life of 2,000 hours at 105°C

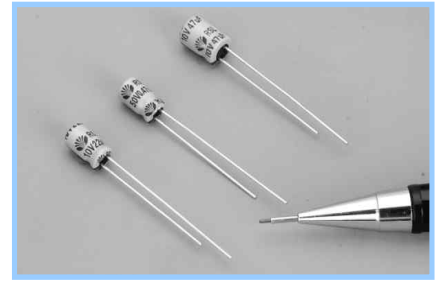

■ Specifications

Item	Performance Characteristics							
Operating temperature range	-40°C ~ +105°C							
Rated working voltage range	6.3V ~ 50V							
Nominal capacitance range	4.7 μF ~ 100 μF , ±20% (at 20°C, 120Hz)							
D.C Leakage current(at 20°C)	The following specifications shall be satisfied when the rated voltage is applied for the required time							
	I ≤ 0.01CV or 3μA (2min), whichever is greater.							
	Where I = Leakage current(μA)		C = Nominal capacitance(μF)			V = Rated voltage (V)		
Tan δ (max., at 20°C, 120Hz)	W.V	6.3	10	16	25	35	50	
	Tan δ	0.24	0.20	0.17	0.15	0.13	0.12	
Characteristics at low temperature(max.) (impedance ratio at 120Hz)	W.V(V)	6.3	10	16	25	35	50	
	Z-25°C/Z+20°C	2	2	2	2	2	2	
	Z-40°C/Z+20°C	6	4	3	3	3	3	
Load life	After applying rated working voltage for 2,000 hours at +105°C and then listed being stabilized at +20°C, capacitors shall meet following limits.							
	Capacitance change	Within ±25% of the initial measured value						
	Tan δ	≤ 300% of the initial specified value						
	Leakage current	≤ The initial specified value						
Shelf life	After storage for 1,000hours at + 105°C with no voltage applied and then being stabilized at +20°C, capacitors shall meet following limits.							
	Capacitance change	Within ±25% of the initial measured value						
	Tan δ	≤ 200% of the initial specified value						
	Leakage current	≤ 200% of the initial specified value						

■ Dimensions

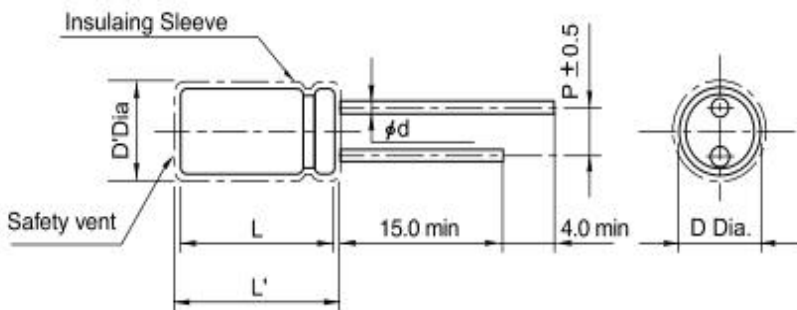

· Standard lead style

Φ D	4.0	5.0	6.3
P	1.5	2.0	2.5
Φ d	0.45		

$D' = [D+0.5] \text{ Max. } L' = [L+1.5] \text{ Max.}$

RSL SERIES

▣ Dimensions & Maximum permissible ripple current

μF \ V	6.3	10	16	25	35	50
4.7						5 x 7 165 0.70
10						6.3 x 7 260 0.35
22					5 x 7 165 0.70	6.3 x 7 260 0.35
33	5 x 7 165 0.70	5 x 7 165 0.70	5 x 7 165 0.70	5 x 7 165 0.70	6.3 x 7 260 0.35	8 x 7 450 0.17
47	5 x 7 165 0.70	5 x 7 165 0.70	5 x 7 165 0.70	6.3 x 7 260 0.35	8 x 7 450 0.17	
68.0	6.3 x 7 260 0.35	6.3 x 7 260 0.35	6.3 x 7 260 0.35	6.3 x 7 260 0.35	8 x 7 450 0.17	
100	6.3 x 7 260 0.35	6.3 x 7 260 0.35	6.3 x 7 260 0.35	8 x 7 450 0.17		
	Case size : $\Phi D \times L$ (mm) Impedance(Z) [Ω max. / 20°C , 100kHz] Maximum permissible ripple current[mA(rms) at 105°C, 100kHz]					